

# Blockchains for Business Process Management - Challenges and Opportunities

JAN MENDLING, Wirtschaftsuniversität Wien, Austria

INGO WEBER, Data61, CSIRO, Australia

WIL VAN DER AALST, Eindhoven University of Technology, The Netherlands

JAN VOM BROCKE, University of Liechtenstein, Liechtenstein

CRISTINA CABANILLAS, Wirtschaftsuniversität Wien, Austria

FLORIAN DANIEL, Politecnico di Milano, Italy

SØREN DEBOIS, IT University of Copenhagen, Denmark

CLAUDIO DI CICCIO, Wirtschaftsuniversität Wien, Austria

MARLON DUMAS, University of Tartu, Estonia

SCHAHRAM DUSTDAR, TU Wien, Austria

AVIGDOR GAL, Technion - Israel Institute of Technology, Israel

LUCIANO GARCÍA-BAÑUELOS, University of Tartu, Estonia

GUIDO GOVERNATORI, Data61, CSIRO, Australia

RICHARD HULL, IBM Research, United States

MARCELLO LA ROSA, Queensland University of Technology, Australia

---

Authors' addresses: J. Mendling, Wirtschaftsuniversität Wien, Vienna, Austria; email: jan.mendling@wu.ac.at; I. Weber, Data61, CSIRO, Sydney, Australia; email: ingo.weber@data61.csiro.au; W. van der Aalst, Eindhoven University of Technology, Eindhoven, The Netherlands; email: w.m.p.v.d.aalst@tue.nl; J. vom Brocke, University of Liechtenstein, Vaduz, Liechtenstein; email: jan.vom.brocke@uni.li; C. Cabanillas, Wirtschaftsuniversität Wien, Vienna, Austria; email: cristina.cabanillas@wu.ac.at; F. Daniel, Politecnico di Milano, Milan, Italy; email: florian.daniel@polimi.it; S. Debois, IT University of Copenhagen, Copenhagen, Denmark; email: debois@itu.dk; C. Di Ciccio, Wirtschaftsuniversität Wien, Vienna, Austria; email: claudio.di.ciccio@wu.ac.at; M. Dumas, University of Tartu, Tartu, Estonia; email: marlon.dumas@ut.ee; S. Dustdar, TU Wien, Vienna, Austria; email: dustdar@tuwien.ac.at; A. Gal, Technion - Israel Institute of Technology, Haifa, Israel; email: avigal@technion.ac.il; L. García-Bañuelos, University of Tartu, Tartu, Estonia; email: luciano.garcia@ut.ee; G. Governatori, Data61, CSIRO, Brisbane, Australia; email: guido.governatori@data61.csiro.au; R. Hull, IBM Research, Yorktown Heights, United States; email: hull@us.ibm.com; M. La Rosa, Queensland University of Technology, Brisbane, Australia; email: m.larosa@qut.edu.au; H. Leopold, Vrije Universiteit, Amsterdam, The Netherlands; email: h.leopold@vu.nl; F. Leymann, IAAS, Universität Stuttgart, Stuttgart, Germany; email: frank.leymann@iaas.uni-stuttgart.de; J. Recker, Queensland University of Technology, Brisbane, Australia; email: j.recker@qut.edu.au; M. Reichert, Ulm University, Ulm, Germany; email: manfred.reichert@uni-ulm.de; H. A. Reijers, Vrije Universiteit, Amsterdam, The Netherlands; email: h.a.reijers@vu.nl; S. Rinderle-Ma, University of Vienna, Vienna, Austria; email: stefanie.rinderle-ma@univie.ac.at; A. Solti, Wirtschaftsuniversität Wien, Vienna, Austria; email: andreas.rogge-solti@wu.ac.at; M. Rosemann, Queensland University of Technology, Brisbane, Australia; email: m.rosemann@qut.edu.au; S. Schulte, TU Wien, Vienna, Austria; email: stefan.schulte@tuwien.ac.at; M. P. Singh, North Carolina State University, Raleigh, United States; email: mpsingh@ncsu.edu; T. Slaats, University of Copenhagen, Copenhagen, Denmark; email: slaats@di.ku.dk; M. Staples, Data61, CSIRO, Sydney, Australia; email: mark.staples@data61.csiro.au; B. Weber, Technical University of Denmark, Lyngby, Denmark; email: bweb@dtu.dk; M. Weidlich, Humboldt-Universität zu Berlin, Berlin, Germany; email: matthias.weidlich@hu-berlin.de; M. Weske, Hasso-Plattner-Institute, Universität Potsdam, Potsdam, Germany; email: mathias.weske@hpi.de; X. Xu and L. Zhu, Data61, CSIRO, Sydney, Australia; email: liming.zhu@data61.csiro.au.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies show this notice on the first page or initial screen of a display along with the full citation. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers, to redistribute to lists, or to use any component of this work in other works requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2018 ACM 2158-656X/2018/02-ART4 \$15.00

<https://doi.org/10.1145/3183367>

HENRIK LEOPOLD, Vrije Universiteit, The Netherlands  
FRANK LEYMANN, IAAS, Universität Stuttgart, Germany  
JAN RECKER, Queensland University of Technology, Australia  
MANFRED REICHERT, Ulm University, Germany  
HAJO A. REIJERS, Vrije Universiteit, The Netherlands  
STEFANIE RINDERLE-MA, University of Vienna, Austria  
ANDREAS SOLTI, Wirtschaftsuniversität Wien, Austria  
MICHAEL ROSEMAN, Queensland University of Technology, Australia  
STEFAN SCHULTE, TU Wien, Austria  
MUNINDAR P. SINGH, North Carolina State University, United States  
TIJS SLAATS, University of Copenhagen, Denmark  
MARK STAPLES, Data61, CSIRO, Australia  
BARBARA WEBER, Technical University of Denmark, Denmark  
MATTHIAS WEIDLICH, Humboldt-Universität zu Berlin, Germany  
MATHIAS WESKE, Hasso-Plattner-Institute, Universität Potsdam, Germany  
XIWEI XU and LIMING ZHU, Data61, CSIRO, Australia

---

Blockchain technology offers a sizable promise to rethink the way interorganizational business processes are managed because of its potential to realize execution without a central party serving as a single point of trust (and failure). To stimulate research on this promise and the limits thereof, in this article, we outline the challenges and opportunities of blockchain for business process management (BPM). We first reflect how blockchains could be used in the context of the established BPM lifecycle and second how they might become relevant beyond. We conclude our discourse with a summary of seven research directions for investigating the application of blockchain technology in the context of BPM.

CCS Concepts: • **Information systems** → **Enterprise information systems**; *Middleware business process managers*; • **Applied computing** → **Business process management**; • **Software and its engineering** → **Software development process management**; • **Computing methodologies** → *Modeling and simulation*;

Additional Key Words and Phrases: Blockchain, business process management, research challenges

#### ACM Reference format:

Jan Mendling, Ingo Weber, Wil Van Der Aalst, Jan Vom Brocke, Cristina Cabanillas, Florian Daniel, Søren Debois, Claudio Di Ciccio, Marlon Dumas, Schahram Dustdar, Avigdor Gal, Luciano García-Bañuelos, Guido Governatori, Richard Hull, Marcello La Rosa, Henrik Leopold, Frank Leymann, Jan Recker, Manfred Reichert, Hajo A. Reijers, Stefanie Rinderle-Ma, Andreas Solti, Michael Rosemann, Stefan Schulte, Munindar P. Singh, Tijs Slaats, Mark Staples, Barbara Weber, Matthias Weidlich, Mathias Weske, Xiwei Xu, and Liming Zhu. 2018. Blockchains for Business Process Management - Challenges and Opportunities. *ACM Trans. Manage. Inf. Syst.* 9, 1, Article 4 (February 2018), 16 pages.  
<https://doi.org/10.1145/3183367>

---

## 1 INTRODUCTION

Business process management (BPM) is concerned with the design, execution, monitoring, and improvement of business processes. Systems that support the execution of processes have been used extensively by companies to streamline and automate *intraorganizational* processes. Yet, for *interorganizational* processes, challenges of joint design and a lack of mutual trust have hampered a broader uptake.

Emerging *blockchain* technology has the potential to drastically change the environment in which interorganizational processes are able to operate. Blockchains offer a way to execute processes in a trustworthy manner even in a network without any mutual trust between nodes. Key aspects are specific algorithms that lead to consensus among the nodes and market mechanisms that motivate the nodes to progress the network. Through these capabilities, this technology has the potential to shift the discourse in BPM research about how systems might enable the execution, monitoring, or improvement of business processes within or across business networks.

In this article, we describe what we believe are the main new challenges and opportunities of blockchain technology for BPM. This leads to directions for research activities to investigate both challenges and opportunities. Section 2 provides a background on fundamental concepts of blockchain technology and an illustrative example of how this technology applies to business processes. Section 3 focuses on the impact of blockchains on the traditional *BPM lifecycle phases* (Dumas et al. 2018). Section 4 goes beyond it and asks which impact blockchains might have on core capability areas of BPM (Rosemann and vom Brocke 2015). Section 5 summarizes this discussion by emphasizing seven future research directions.

## 2 BACKGROUND

This section summarizes the essential aspects of blockchain technology and discusses initial research efforts at the intersection of BPM and blockchains.

### 2.1 Blockchain Technology

In its original form, Blockchain is a distributed database technology that builds on a tamper-proof list of timestamped transaction records. Among other uses, it is employed for cryptocurrencies such as Bitcoin (Nakamoto 2008). Its innovative power stems from allowing parties to transact with others they do not trust over a computer network in which nobody is trusted. This is enabled by a combination of peer-to-peer networks, consensus-making, cryptography, and market mechanisms.

Blockchain derives its name from the fact that its essential data structure is a chained list of blocks. This chain of blocks is distributed over a peer-to-peer network, in which every node maintains the latest version of it. Blocks can contain information about transactions. In this way, we can know, for instance, that a buyer has ordered 200 items of a particular type of material from a vendor at a specific time. When a new block is added to the blockchain, it is signed using cryptographic methods. In this way, it can be checked if its content and its signature match. For example, if we take the content  $c$  = "Buyer orders 200 items from vendor" and apply a specific hash function  $h(c)$ , we get a unique result  $r$ . Every block is associated with a hash generated from its content *and* the hash value of the previous block in the list. Hash values thus uniquely represent not only the transactions within blocks but also the ordering of every block. This mechanism is at the basis of the chain. In case somebody would try to alter a transaction, this would change the hash value of its block and, therefore, break the chain. Since every node can create blocks in a peer-to-peer network, there has to be consensus on the new version of the blockchain, including a new block. This is achieved with consensus algorithms that are based on concepts such as proof-of-work or proof-of-stake (Bentov et al. 2016) and, more recently, *proof-of-elapsed-time*.<sup>1</sup> In proof-of-work, miners guess a value for a specific field to fulfill the condition that  $r$  must be smaller than a threshold (which is dynamically adjusted by the network based on a predefined protocol). In proof-of-stake, miner selection considers the size of their stake, i.e., amount of cryptocurrency held by them. The rationale is that a high stake is a strong motivation for not cheating: if the miners cheat (and this is detected), the respective cryptocurrency will be devalued. The network protocols and dynamic

<sup>1</sup>Intel: Proof-of-elapsed-time (PoET). Available from <http://intelledger.github.io/>.

adjustment of thresholds are designed to avoid network overload. In summary, these foundational blockchain concepts support two important notions that are also essential for business processes: the blockchain as a (tamper-proof) data structure captures the history and the current state of the network and transactions move the system to a new state.

Blockchain offers an additional concept that is important for business processes, called *smart contracts* (Szabo 1997). Consider again the example of the buyer ordering 200 items from the vendor. Business processes are subject to rules on how to respond to specific conditions. If, for instance, the vendor does not deliver within two weeks, the buyer might be entitled to receive a penalty payment. Such business rules can be expressed by smart contracts. For instance, the *Ethereum* blockchain supports a Turing-complete programming language for smart contracts.<sup>2</sup> The code in these languages is deterministic and relies on a closed-world assumption: only information that is stored on the blockchain is available in the runtime environment. Smart contract code is deployed with a specific type of transaction. As with any other blockchain transaction, the deployment of smart contract code to the blockchain is immutable. Once deployed, smart contracts offer a way to execute code directly on the blockchain network, such as the conditional transfer of money in our example if a certain condition is fulfilled.

By using blockchain technology, untrusted parties can establish trust in the truthful execution of the code. Smart contracts can be used to implement business collaborations in general and interorganizational business processes in particular. The potential of blockchain-based distributed ledgers to enable collaboration in open environments has been successfully tested in diverse fields ranging from diamond trading to securities settlement (Walport 2016).

At this stage, it has to be noted that blockchain technology still faces numerous general technological challenges. A mapping study by Yli-Huumo et al. (2016) found that a majority of these challenges have not been addressed by the research community, though we note that blockchain developer communities actively discuss some of these challenges and suggest a myriad of potential solutions.<sup>3</sup> Some challenges can be addressed by using private or consortium blockchains instead of a fully open network (Mougayar 2016). In general, the technological challenges include the following (Swan 2015).

**Throughput** in the Ethereum blockchain is currently limited to approximately 15 transaction inclusions per second (tps). In comparison, transaction volumes for the VISA payment network are 2,000 tps, on average, with a tested capacity of up to 50,000 tps. However, the experimental Red Belly Blockchain, which particularly caters to private or consortium blockchains, has achieved more than 400,000 tps in a lab test.<sup>4</sup>

**Latency** is also an issue. Transaction inclusion in the absence of network congestion takes a certain amount of time. In addition, a number of confirmation blocks are typically recommended to ensure that the transaction does not get removed due to accidental or malicious forking. This means that transactions can be seen as committed after 60 minutes on average in Bitcoin, or 3 to 10 minutes in Ethereum. Even with improvements of techniques such as the *lightning network* or *side chains* spawned off from the main chain, blockchains are unlikely to achieve latencies as low as centrally controlled systems.

**Size and bandwidth** limitations are variations of the throughput issue: if the transaction volume of VISA were to be processed by Bitcoin, the full replication of the entire blockchain data structure would pose massive problems. Yli-Huumo et al. (2016) quote 214 PB per year, thus posing a challenge in data storage and bandwidth. Private and

<sup>2</sup><https://www.ethereum.org/>.

<sup>3</sup><http://www.the-blockchain.com/2017/01/24/adi-ben-ari-outstanding-challenges-blockchain-technology-2017/>.

<sup>4</sup><http://poseidon.it.usyd.edu.au/~concurrentsystems/rbbc/>.

consortium chains and concepts such as the lightning network or side chains all aim to address these challenges. In this context, it is worth noting that most everyday users can use *wallets* instead, which require only small amounts of storage.

**Usability** is limited at this point in terms of both developer support (lack of adequate tooling) and end-user support (hard to use and understand). Recent advances on developer support include efforts by some of the authors toward model-driven development of blockchain applications (García-Bañuelos et al. 2017; Tran et al. 2017; Weber et al. 2016).

**Security** will always pose a challenge on an open network such as a public blockchain. Security is often discussed in terms of the CIA properties (Dhillon and Backhouse 2000). First, *confidentiality* is per se low in a distributed system that replicates all data over its network but can be addressed by targeted encryption (Kosba et al. 2016). Second, *integrity* is a strong suit of blockchains, though challenges do exist (Eyal and Sirer 2014; Gervais et al. 2016). Third, *availability* can be considered high in terms of reads from blockchain owing to the wide replication but is less favorable in terms of write availability (Weber et al. 2017). New attack vectors exist around forking, e.g., through network segregation (Natoli and Gramoli 2017). These are particularly relevant in private or consortium blockchains.

**Wasted resources**, particularly electricity, are owing to the consensus mechanism, in which miners constantly compete in a race to mine the next block for a high reward. In an empirical analysis, Weber et al. (2017) found that about 10% of announced new blocks on the Ethereum network were uncles (forks of length 1). This can be seen as wasteful but is just a small indication of the vast duplication of effort in *proof-of-work* mechanisms. Longer forks (at most of length 3) were extremely rare; thus, accidental forking seems unlikely in a well-connected network such as the Internet, but could occur if larger nations were cut off temporarily or even permanently. Alternatives to the proof-of-work, such as *proof-of-stake* (Bentov et al. 2016), have been discussed for a while and would be much more efficient. At the time of writing, they remain an unproven but highly interesting alternative. Proof-of-work makes very low assumptions in trusting other participants, which is well suited for an open network managing digital assets. Designing more efficient protocols without relaxing these assumptions has proven a challenge.

**Hard forks** are changes to the protocol of a blockchain that enable transactions or blocks previously considered invalid (Decker and Wattenhofer 2013). They essentially change the rules of the game and therefore require adoption by a vast majority of the miners to be effective (Bonneau et al. 2015). While hard forks can be controversial in public blockchains, as demonstrated by the split of the Ethereum blockchain into a hard forked main chain and Ethereum Classic (ETC), this is less of an issue for private and consortium blockchains, in which such a consensus is more easily found.

Many of these general technological challenges of blockchains are currently the focus of the emerging body of research. As noted, our main interest is in the *potential* of blockchain technology to enable a shift in BPM research. Our belief is vested both in the novel technological properties discussed above and in the already available attempts of using blockchain technology in the definition and implementation of fundamentally novel business processes. We review these attempts in the following.

## 2.2 Business Processes and Blockchain Technology

We are not the first to identify the application potential of blockchain technology to business processes. In fact, several blockchains are currently adopted in various domains to facilitate the operation of new business processes. For example, Nofer et al. (2017) list applications in the financial

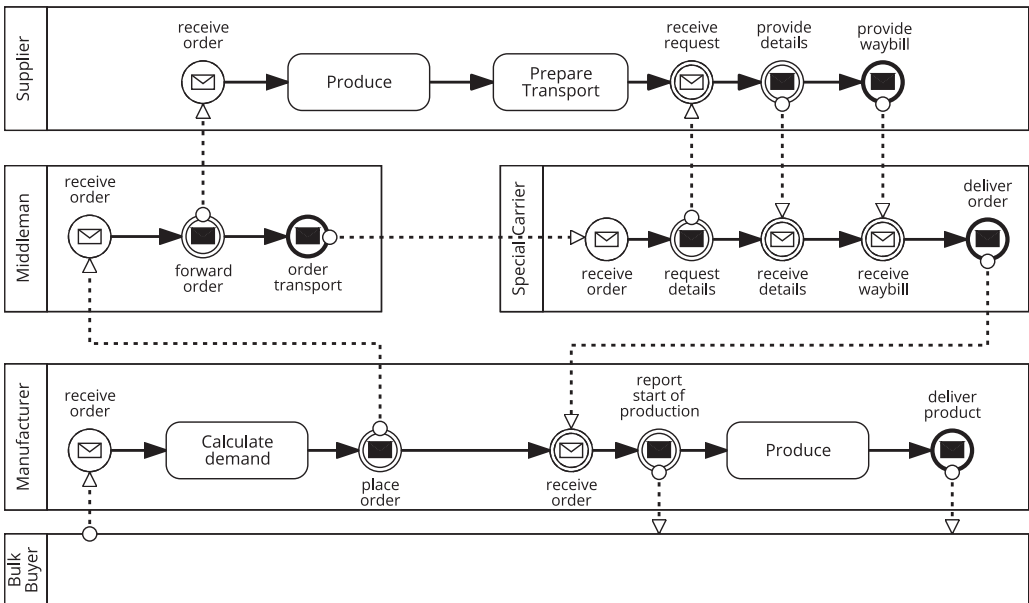


Fig. 1. Supply chain scenario from Weber et al. (2016).

sector, including cryptocurrency transactions, securities trading and settlement, and insurance as well as nonfinancial applications, such as notary services, music distribution, and various services such as proof of existence, authenticity, or storage. Other works describe application scenarios involving blockchain technology in logistics and supply chain processes, for instance, in the agricultural sector (Staples et al. 2017).

A proposal to support interorganizational processes through blockchain technology is described by Weber et al. (2016): large parts of the control flow and business logic of interorganizational business processes can be compiled from process models into smart contracts that ensure that the joint process is correctly executed. So-called *trigger* components allow the connection of these interorganizational process implementations to Web services and internal process implementations. These triggers serve as a bridge between the blockchain and enterprise applications. The cryptocurrency concept enables the optional implementation of conditional payment and built-in escrow management at defined points within the process, when this is desired and feasible.

To illustrate these capabilities, Figure 1 shows a simplified supply chain scenario, in which a bulk buyer orders goods from a manufacturer. The manufacturer, in turn, orders supplies through a middleman, which are sent from the supplier to the manufacturer via a special carrier. Without global monitoring, each participant has restricted visibility of the overall progress. This may very well be a basis for misunderstandings and shifting blame in cases of conflict. Model-driven approaches, such as those proposed by García-Bañuelos et al. (2017) and Weber et al. (2016), produce code for smart contracts that implement the process (see Figure 2).

If executed using smart contracts on a blockchain, typical barriers complicating the deployment of interorganizational processes can be removed. (i) The blockchain can serve as an immutable public ledger so that participants can review a trustworthy history of messages to pinpoint the source of an error. This means that all state-changing messages have to be recorded in the blockchain. (ii) Smart contracts can offer independent process monitoring from a global viewpoint such that only expected messages are accepted and only if they are sent from the player registered for the

```

1  contract BPMNContract {
2    uint marking = 1;
3    address manufacturer;
4    ...
5    function PlaceOrder ( -input data - ) returns ( bool ) {
6      if ( msg.sender != manufacturer ) return false ;
7      if ( marking & 2 == 2 ) { // is the task activated?
8        // custom task logic, if any, is inserted here
9        step( marking & uint (~2) | 4 ); // deactivate current task and activate the next
10     }
11     return true ;
12   }
13   return false ;
14 }
15 ...

```

Fig. 2. Smart contract snippet illustrating how code is generated from a BPMN model. It shows the implementation of function `PlaceOrder` from the above process model. This function is to be executed by the manufacturer, which is checked in Line 6. Subsequently, we check to see whether the function is activated in Line 7. If so, any custom task logic is executed and the activation of tasks is updated in Line 9. For more details, see García-Bañuelos et al. (2017).

respective role in the process instance. (iii) Encryption can ensure that only the data that must be visible is public while the remaining data is readable only for the process participants who require it.

These capabilities demonstrate how blockchains can help organizations to implement and execute business processes across organizational boundaries even if they cannot agree on a trusted third party. This is a fundamental advance, because the core aspects of this technology enable support of enterprise collaborations going far beyond asset management, including the management of entire supply chains, tracking food from source to consumption to increase safety, or sharing personal health records in privacy-ensuring ways among medical service providers.

The technical realization of this advance is still nascent at this stage, although some early efforts can be found in the literature. For example, smart contracts that enforce process execution in a trustworthy way can be generated from BPMN process models (Weber et al. 2016) and from domain-specific languages (Frantz and Nowostawski 2016). Further cost optimizations are proposed by García-Bañuelos et al. (2017). Figure 2 shows a code excerpt that was generated by this approach. In a closely related work, Hull et al. (2016) emphasize the affinity of artifact-centric process specification (Cohn and Hull 2009; Marin et al. 2012) for blockchain execution.

Even at this stage, research on the benefits and potentials of blockchain technology is mixed with studies that highlight or examine issues and challenges. For example, Norta (2015, 2016) discusses ways to ensure secure negotiation and creation of smart contracts for Decentralized Autonomous Organizations (DAOs), among others, in order to avoid attacks such as the DAO hack during which approximately US\$ 60 million was stolen. This, in turn, was remediated by a hard fork of the Ethereum blockchain, which was controversial among the respective mining node operators and resulted in a part of the public Ethereum network splintering off into the ETC network. This split, in turn, caused major issues for the network in the medium term, allowing, among others, *replay attacks* in which transactions from Ethereum can be replayed on ETC. A formal analysis of smart contract participants using game theory and formal methods is conducted by Bigi et al. (2015). As pointed out by Norta (2016), the assumption of perfect rationality underlying the game-theoretic analysis is unlikely to hold for human participants.

These examples show that blockchain technology and its application to BPM are at an important crossroad: technical realization issues blend with promising application scenarios; early implementations mix with unanticipated challenges. It is timely, therefore, for the scholarly community to discuss open questions in broad and encompassing ways. We do so in the two sections that follow.

### 3 BLOCKCHAIN TECHNOLOGY AND THE BPM LIFECYCLE

In this section, we discuss blockchain in relation to the traditional BPM lifecycle (Dumas et al. 2018), including the following phases: identification, discovery, analysis, redesign, implementation, execution, monitoring, and adaptation. Using the traditional BPM lifecycle as a framework of reference allows us to discuss many incremental changes that blockchains might provide.

#### 3.1 Identification

Process identification is concerned with the high-level description and evaluation of a company from a process-oriented perspective, thus connecting strategic alignment with process improvement. Currently, identification is mostly approached from an inward-looking perspective (Dumas et al. 2018). Blockchain technology adds another relevant perspective for evaluating high-level processes in terms of the implied strengths, weaknesses, opportunities, and threats. For example, how can a company systematically identify the most suitable processes for blockchains or the most threatened ones? Research is needed into how this perspective can be integrated into the identification phase. Because blockchains have affinity with the support of interorganizational processes, process identification may need to encompass not only the needs of one organization but broader known and even unknown partners.

#### 3.2 Discovery

Process discovery refers to the collection of information about the current way a process operates and its representation as an *as-is* process model. Currently, methods for process discovery are largely based on interviews, walkthroughs, and documentation analysis, complemented with automated process discovery techniques over nonencrypted event logs generated by process-aware information systems (van der Aalst 2016). Blockchain technology defines new challenges for process discovery techniques: the information may be fragmented and encrypted, accounts and keys can change frequently, and payload data may be stored partly on-chain and partly off-chain. For example, how can a company discover an overall process from blockchain transactions when these might not be logically related to a process identifier? This fragmentation might require a repeated alignment of information from all relevant parties operating on the blockchain. Work on matching could represent a promising starting point to solve this problem (Cayoglu et al. 2014; Euzenat and Shvaiko 2013; Gal 2011). There is both the risk and opportunity of conducting process mining on blockchain data. An opportunity could involve establishing trust in how a process or a prospective business partner operates, while a risk is that other parties might be able to understand operational characteristics from blockchain transactions. There are also opportunities for reverse-engineering business processes, among others, from smart contracts.

#### 3.3 Analysis

Process analysis refers to obtaining insights into issues relating to the way a business process currently operates. At present, the analysis of processes mostly builds on data that is available inside of organizations or from perceptions shared by internal and external process stakeholders (Dumas et al. 2018). Records of processes executed on the blockchain yield valuable information that can help to assess the caseload, durations, frequencies of paths, parties involved, and correlations between unencrypted data items. These pieces of information can be used to discover processes, detect deviations, and conduct root cause analysis (van der Aalst 2016), ranging from small groups of companies to an entire industry at large. The question is which effort is required to bring the available blockchain transaction data into a format that permits such analysis.



### 3.4 Redesign

Process redesign deals with the systematic improvement of a process. Currently, approaches such as redesign heuristics build on the assumption that there are recurring patterns of how a process can be improved (Vanwersch et al. 2016). Blockchain technology offers novel ways of improving specific business processes or resolving specific problems. For instance, instead of involving a trustee to release a payment if an agreed condition is met, a buyer and a seller of a house might agree on a smart contract instead. The question is where blockchains can be applied for optimizing existing interactions and where new interaction patterns without a trusted central party can be established, potentially drawing on insights from related research on Web service interaction (Barros et al. 2005). A promising direction for developing blockchain-appropriate abstractions and heuristics may come from data-aware workflows (Marin et al. 2012) and BPMN choreography diagrams (Decker and Weske 2011). Both techniques combine two primary ingredients of blockchain, data and process, in a holistic manner that is well suited for top-down design of interorganizational processes. It might also be beneficial to formulate blockchain-specific redesign heuristics that could mimic how Incoterms (Ramberg 2011) define standardized interactions in international trade. Specific challenges for redesign include the joint engineering of blockchain processes between all parties involved, an ongoing problem for choreography design.

### 3.5 Implementation

Process implementation refers to the procedure of transforming a *to-be* model into software components executing the business process. Currently, business processes are often implemented using process-aware information systems or business process management systems inside single organizations. In this context, the question is how the involved parties can make sure that the implementation that they deploy on the blockchain supports their process as desired. Some of the challenges regarding the transformation of a process model to blockchain artifacts are discussed by Weber et al. (2016). Several ideas from earlier work on choreography can be reused in this new setting (Chopra et al. 2014; Decker and Weske 2011; Mendling and Hafner 2008; Telang and Singh 2012; van der Aalst and Weske 2001; Weber et al. 2008). Note that choreographies have not been adopted by industry to a large extent yet. Despite this, they are especially helpful in interorganizational settings, where it is not possible to control and monitor a complete process in a centralized fashion because of organizational borders (Breu et al. 2013). To verify that contracts between choreography stakeholders have been fulfilled, a trust basis, which is not under control of a particular party, needs to be established. Blockchains may serve to establish this kind of trust between stakeholders.

An important engineering challenge on the implementation level is the identification and definition of abstractions for the design of blockchain-based business process execution. Libraries and operations for engines are required, accompanied by modeling primitives and language extensions of BPMN. Software patterns and anti-patterns will be helpful to engineers designing blockchain-based processes. There is also a need for new approaches for quality assurance, correctness, and verification, as well as for new corresponding correctness criteria. These can build on existing notions of compliance (van der Aalst et al. 2008), reliability (Subramanian et al. 2008), quality of service (Zeng et al. 2004), or data-aware workflow verification (Calvanese et al. 2013) but will have to go further in terms of consistency and consideration of potential payments. Furthermore, dynamic partner binding and rebinding is a challenge that requires attention. Process participants will have to find partners, either manually or automatically, on dedicated marketplaces using dedicated look-up services. The property of inhabiting a certain role in a process might itself be a tradable asset. For example, a supplier might auction off the role of shipper to the highest bidder

as part of the process. Finally, as an increasing number of companies use blockchains, there will be a proliferation of smart contract templates available for use. Tools for finding templates appropriate for a given style of collaboration will be essential. All these characteristics emphasize the need for specific testing and verification approaches.

### 3.6 Execution

Execution refers to the instantiation of individual cases and their information-technological processing. Currently, such execution is facilitated by process-aware information systems or business process management systems (Dumas et al. 2018). For the actual execution of a process deployed on a blockchain following the method of Weber et al. (2016), several differences from the traditional ways exist. During the execution of an instance, messages between participants need to be passed as blockchain transactions to the smart contract; resulting messages need to be observed from the blocks in the blockchain. Both of these can be achieved by integrating blockchain technology directly with existing enterprise systems or through the use of dedicated integration components, such as the triggers suggested by Weber et al. (2016). First prototypes, such as Caterpillar as a business process management system that builds on blockchains, are emerging (López-Pintado et al. 2017). The main challenge here involves ensuring correctness and security, especially when monetary assets are transferred using this technology.

### 3.7 Monitoring

Process monitoring refers to collecting events of process executions, displaying them in an understandable way, and triggering alerts and escalation in cases in which undesired behavior is observed. At present, such process execution data is recorded by systems that support process execution (Dumas et al. 2018). First, we face issues in terms of data fragmentation and encryption, as in the analysis phase. For example, the data on the blockchain alone will likely not be enough to monitor the process and instead will require an integration with local off-chain data. Once such tracing is in place, the global view of the process can be monitored independently by each involved party. This provides a suitable basis for continuous conformance and compliance checking and monitoring of service-level agreements. Second, based on monitoring data exchanged via the blockchain, it is possible to verify if a process instance meets the original process model and the contractual obligations of all involved process stakeholders. For this, blockchain technology can be exploited to store the process execution data and handoffs between process participants. Notably, this is even possible without the usage of smart contracts, i.e., in a first-generation blockchain such as the one operated by Bitcoin (Prybila et al. 2017).

### 3.8 Adaptation and Evolution

Runtime adaptation refers to the concept of changing the process during execution. In traditional approaches, this can be achieved by allowing participants in a process to change the model during its execution (Reichert and Weber 2012). Interacting partners might take a defensive stance in order to avoid certain types of adaptation. As discussed by Weber et al. (2016), blockchain can be used to enforce conformance with the model so that participants can rely on the joint model being followed. In such a setting, adaptation is by default something to be *avoided*: if a participant can change the model, this could be used to gain an unfair advantage over the other participants. For instance, the rules of retrieving cryptocurrency from an escrow account could be changed or the terms of payment. In this setting, process adaptation must strictly adhere to defined paths for it, e.g., any change to a deployed smart contract may require a transaction signed by all participants. In contrast, the method proposed by Prybila et al. (2017) allows runtime adaptation, but assumes that relevant participants monitor the execution and react if a change is undesired.

If smart contracts enforce the process, there are also problems arising in relation to evolution: new smart contracts need to be deployed to reflect changes to a new version of the process model. Porting running instances from an old version to a new one would require effective coordination mechanisms involving all participants. Some challenges for choreographies are summarized by Fdhila et al. (2015).

## 4 BLOCKCHAIN TECHNOLOGY AND BPM CAPABILITIES

There are also challenges and opportunities for BPM and blockchain technology beyond the classical BPM lifecycle. We refer to the BPM capability areas (Rosemann and vom Brocke 2015) beyond the methodological support that we reflected above, including strategy, governance, information technology, people, and culture.

### 4.1 Strategy

Strategic alignment refers to the active management of connections between organizational priorities and business processes (Rosemann and vom Brocke 2015), which aims at facilitating effective actions to improve business performance. Currently, various approaches to BPM assume that the corporate strategy is defined first and business processes are aligned with the respective strategic imperatives (Dumas et al. 2018). Blockchain technology challenges these approaches to strategic alignment. For many companies, blockchains define a potential threat to their core business processes. For instance, the banking industry could see a major disintermediation based on blockchain-based payment services (Guo and Liang 2016). Also, lock-in effects (Tassef 2000) might deteriorate when, for example, the banking service is not the banking network itself anymore, but only the interface to it. These developments could lead to business processes and business models being under strong influence of technological innovations outside of companies.

### 4.2 Governance

BPM governance refers to appropriate and transparent accountability in terms of roles, responsibilities, and decision processes for different BPM-related programs, projects, and operations (Rosemann and vom Brocke 2015). At present, BPM as a management approach builds on the explicit definition of BPM-related roles and responsibilities, with a focus on the internal operations of a company. Blockchain technology might move governance toward a more externally oriented model of self-governance based on smart contracts. Research on corporate governance investigates agency problems and mechanisms to provide effective incentives for intended behavior (Shleifer and Vishny 1997). Smart contracts can be used to establish new governance models as exemplified by the Decentralized Autonomous Organization (DAO).<sup>5</sup> It is an important question in how far this idea of the DAO can be extended toward reducing the agency problem of management discretion or eventually eliminate the need for management altogether. Furthermore, the revolutionary change suggested by the DAO shows just how disruptive this technology can be and whether similarly radical changes could apply to BPM.

### 4.3 Information Technology

BPM-related information technology subsumes all systems that support process execution, such as process-aware information systems and business process management systems. These systems typically assume central control over the process.

Blockchain technology enables novel ways of process execution, but several challenges in terms of security and privacy have to be considered. While the visibility of encrypted data on a blockchain

---

<sup>5</sup><https://daohub.org>.

is restricted, it is up to the participants in the process to ensure that these mechanisms are used according to their confidentiality requirements. Some of these requirements are currently being investigated in the financial industry.<sup>6</sup> Further challenges can be expected with the introduction of the General Data Protection Regulation.<sup>7</sup> It is also not clear which new attack scenarios on blockchain networks might emerge (Hurlburt 2016). Therefore, guidelines for using private, public, or consortium-based blockchains are required (Mougayar 2016). It also has to be decided what types of smart contract and which cryptocurrency are allowed to be used in a corporate setting.

#### 4.4 People

*People* in this context refers to all individuals, possibly in different roles, who engage with BPM (Rosemann and vom Brocke 2015). These are people who work as process analyst, process manager, process owner, or in other process-related roles. The roles of these individuals are shaped by skills in the area of management, business analysis, and requirements engineering. In this capability area, the use of blockchain technology requires extensions of their skill sets. New required skills relate to partner and contract management, software engineering, and cryptography. Also, people have to be willing to design blockchain-based collaborations within the frame of existing regulations to enable adoption. This implies that research into blockchain-specific technology acceptance is needed, extending the established technology acceptance model (Venkatesh et al. 2003).

#### 4.5 Culture

Organizational culture is defined by the collective values of a group of people in an organization (Rosemann and vom Brocke 2015). BPM is discussed in relation to organizational culture (vom Brocke and Sinnl 2011) from a perspective that emphasizes an affinity with clan and hierarchy culture (Štemberger et al. 2017). These cultural types are often found in the many companies that use BPM as an approach for documentation. Blockchains are likely to influence organizational culture to adopt a stronger emphasis on flexibility and an outward-looking perspective. In the competing values framework by Cameron and Quinn (2005), these aspects are associated with an adhocracy organizational culture. Furthermore, not only consequences of blockchain adoption have to be studied but also antecedents. These include organizational factors that facilitate early and successful adoption.

### 5 SEVEN FUTURE RESEARCH DIRECTIONS

Blockchains will fundamentally shift how we deal with transactions in general and, therefore, how organizations manage their business processes within their network. Our discussion of challenges in relation to the BPM lifecycle and beyond points to seven major future research directions. For some, we expect viable insights to emerge sooner, for others. The order loosely reflects how soon such insights might appear.

- (1) Developing a diverse set of *execution and monitoring systems* on blockchains. Research in this area will have to demonstrate the feasibility of using blockchains for process-aware information systems. Among other factors, design science and algorithm engineering will be required here. Insights from software engineering and distributed systems will be informative.
- (2) Devising new *methods for analysis and engineering* business processes based on blockchain technology. Research in this topic area will have to investigate how blockchain-based

<sup>6</sup><https://gandal.me/2016/04/05/introducing-r3-corda-a-distributed-ledger-designed-for-financial-services/>.

<sup>7</sup>[http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=uriserv:OJ.L\\_.2016.119.01.0001.01.ENG](http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=uriserv:OJ.L_.2016.119.01.0001.01.ENG).

- processes can be efficiently specified and deployed. Among other factors, formal research methods and design science will be required to study this topic. Insights from software engineering and database research will be informative here.
- (3) *Redesigning processes* to leverage the opportunities granted by blockchains. Research in this context will have to investigate how blockchains may allow reimagining specific processes and the collaboration with external stakeholders. The whole area of choreographies may be revitalized by this technology. Among other factors, design science will be required here. Insights from operations management and organizational science will be informative.
  - (4) Defining appropriate methods for *evolution and adaptation*. Researchers in this area will have to investigate the potential guarantees that can be made for certain types of evolution and adaptation. Among other factors, formal research methods, verification and design science will be required here. Insights from theoretical computer science will be informative.
  - (5) Developing techniques for identifying, discovering, and analyzing relevant processes for the *adoption* of blockchain technology. Researchers will have to investigate which characteristics of blockchain as a technology best meet requirements of specific processes. Among other factors, empirical research methods and design science will be required. Insights from management science and innovation research will be informative here.
  - (6) Understanding the *impact on strategy and governance* of blockchains, in particular, regarding new business and governance models enabled by revolutionary innovation based on blockchains. Researchers in this topic area will have to study which processes in an enterprise setting could be organized differently using blockchains and what consequences this brings. Among other factors, empirical research methods will be required to investigate this topic. Insights from organizational science and business research will be informative.
  - (7) Investigating the *culture shift* toward openness in the management and execution of business processes, and on hiring as well as upskilling people, as needed. Researchers in this topic area will have to investigate how corporate culture changes with the introduction of blockchains and in how far this differs from the adoption of other technologies. Among other factors, empirical methods will be required for research in this area. Insights from organizational science and business research will be informative.

The BPM and Information Systems communities have a unique opportunity to help shape this fundamental shift toward a distributed, trustworthy infrastructure to promote interorganizational processes. With this article, we aim to provide clarity, focus, and impetus for the research challenges that are upon us.

## ACKNOWLEDGMENT

The research reported in this paper is partially sponsored by the EU H2020 programme under the MSCA-RISE agreement 645751 (RISE BPM).

## REFERENCES

- Alistair Barros, Marlon Dumas, and Arthur H. M. ter Hofstede. 2005. Service interaction patterns. In *Proceedings of the International Conference on Business Process Management*. Springer, 302–318.
- Iddo Bentov, Ariel Gabizon, and Alex Mizrahi. 2016. *Cryptocurrencies without Proof of Work*. Springer, Berlin, 142–157. DOI: [http://dx.doi.org/10.1007/978-3-662-53357-4\\_10](http://dx.doi.org/10.1007/978-3-662-53357-4_10)
- Giancarlo Bigi, Andrea Bracciali, Giovanni Meacci, and Emilio Tuosto. 2015. *Validation of Decentralised Smart Contracts Through Game Theory and Formal Methods*. Springer, 142–161.

- J. Bonneau, A. Miller, J. Clark, A. Narayanan, J. A. Kroll, and E. W. Felten. 2015. SoK: Research perspectives and challenges for bitcoin and cryptocurrencies. In *Proceedings of the 2015 IEEE Symposium on Security and Privacy*. 104–121. DOI : <http://dx.doi.org/10.1109/SP.2015.14>
- Ruth Breu, Schahram Dustdar, Johann Eder, Christian Huemer, Gerti Kappel, Julius Köpke, Philip Langer, Jürgen Mangler, Jan Mendling, Gustaf Neumann, Stefanie Rinderle-Ma, Stefan Schulte, Stefan Sobernig, and Barbara Weber. 2013. Towards living inter-organizational processes. In *Proceedings of the 15th IEEE Conference on Business Informatics*. IEEE, 363–366. DOI : <http://dx.doi.org/10.1109/CBI.2013.59>
- Diego Calvanese, Giuseppe De Giacomo, and Marco Montali. 2013. Foundations of data-aware process analysis: A database theory perspective. In *Proceedings of the 32nd ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems (PODS'13)*, Richard Hull and Wenfei Fan (eds.). ACM, 1–12.
- Kim S. Cameron and Robert E. Quinn. 2005. *Diagnosing and Changing Organizational Culture: Based on the Competing Values Framework*. John Wiley & Sons, Hoboken, NJ.
- Ugur Cayoglu, Remco M. Dijkman, Marlon Dumas, Peter Fettke, Luciano García-Bañuelos, Philip Hake, Christopher Klinkmüller, Henrik Leopold, André Ludwig, Peter Loos, Jan Mendling, Andreas Oberweis, Andreas Schoknecht, Eitam Sheerit, Tom Thaler, Meike Ullrich, Ingo Weber, and Matthias Weidlich. 2014. Report: The process model matching contest 2013. In *Proceedings of the 2013 International Workshops on Business Process Management Workshops Revised Papers, Lecture Notes in Business Information Processing*, Niels Lohmann, Minseok Song, and Petia Wohed (eds.), Vol. 171. Springer, Berlin, 442–463.
- Amit K. Chopra, Fabiano Dalpiaz, F. Başak Aydemir, Paolo Giorgini, John Mylopoulos, and Munindar P. Singh. 2014. Protos: Foundations for engineering innovative sociotechnical systems. In *Proceedings of the 18th IEEE International Requirements Engineering Conference (RE'14)*. IEEE Computer Society, 53–62.
- David Cohn and Richard Hull. 2009. Business artifacts: A data-centric approach to modeling business operations and processes. *IEEE Data Engineering Bulletin* 32, 3, 3–9.
- Christian Decker and Roger Wattenhofer. 2013. Information propagation in the bitcoin network. In *P2P*. IEEE, 1–10.
- Gero Decker and Mathias Weske. 2011. Interaction-centric modeling of process choreographies. *Information Systems* 36, 2, 292–312.
- Gurpreet Dhillon and James Backhouse. 2000. Technical opinion: Information system security management in the new millennium. *Communications of the ACM* 43, 7, 125–128.
- Marlon Dumas, Marcello La Rosa, Jan Mendling, and Hajo A. Reijers. 2018. *Fundamentals of Business Process Management*. 2nd ed. Springer.
- Jérôme Euzenat and Pavel Shvaiko. 2013. *Ontology Matching*. 2nd ed. Springer.
- Ittay Eyal and Emin Gün Sirer. 2014. *Majority Is Not Enough: Bitcoin Mining Is Vulnerable*. Springer, Berlin, 436–454. DOI : [http://dx.doi.org/10.1007/978-3-662-45472-5\\_28](http://dx.doi.org/10.1007/978-3-662-45472-5_28)
- Walid Fdhila, Conrad Indiono, Stefanie Rinderle-Ma, and Manfred Reichert. 2015. Dealing with change in process choreographies: Design and implementation of propagation algorithms. *Information Systems* 49, 1–24. DOI : <http://dx.doi.org/10.1016/j.is.2014.10.004>
- Christopher K. Frantz and Mariusz Nowostawski. 2016. From institutions to code: Towards automated generation of smart contracts. In *Proceedings of the Workshop on Engineering Collective Adaptive Systems (eCAS'16), co-located with SASO, Augsburg*.
- Avigdor Gal. 2011. *Uncertain Schema Matching*. Morgan & Claypool, Burlington, MA.
- Luciano García-Bañuelos, Alexander Ponomarev, Marlon Dumas, and Ingo Weber. 2017. Optimized execution of business processes on blockchain. In *Proceedings of the International Conference on Business Process Management (BPM'17)*.
- Arthur Gervais, Ghassan O. Karame, Karl Wüst, Vasileios Glykantzis, Hubert Ritzdorf, and Srdjan Capkun. 2016. On the security and performance of proof of work blockchains. In *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security (CCS'16)*. ACM, New York, NY, 3–16. DOI : <http://dx.doi.org/10.1145/2976749.2978341>
- Ye Guo and Chen Liang. 2016. Blockchain application and outlook in the banking industry. *Financial Innovation* 2, 1, 24.
- Richard Hull, Vishal S. Batra, Yi-Min Chen, Alin Deutsch, Fenno F. Terry Heath III, and Victor Vianu. 2016. Towards a shared ledger business collaboration language based on data-aware processes. In *Proceedings of the 14th International Conference Service-Oriented Computing (ICSOC'16), Lecture Notes in Computer Science*, Quan Z. Sheng, Eleni Stroulia, Samir Tata, and Sami Bhiri (eds.), Vol. 9936. Springer, Berlin, 18–36.
- George Hurlburt. 2016. Might the blockchain outlive bitcoin? *IT Professional* 18, 2, 12–16.
- A. Kosba, A. Miller, E. Shi, Z. Wen, and C. Papamanthou. 2016. Hawk: The blockchain model of cryptography and privacy-preserving smart contracts. In *Proceedings of the 2016 IEEE Symposium on Security and Privacy (SP'16)*. 839–858. DOI : <http://dx.doi.org/10.1109/SP.2016.55>
- Orlenys López-Pintado, Luciano García-Bañuelos, Marlon Dumas, and Ingo Weber. 2017. Caterpillar: A blockchain-based business process management system. In *Proceedings of the BPM Demo Track and BPM Dissertation Award co-located with 15th International Conference on Business Process Modeling (BPM'17) (CEUR Workshop Proceedings)*, Robert Clarisó,

- Henrik Leopold, Jan Mendling, Wil M. P. van der Aalst, Akhil Kumar, Brian T. Pentland, and Mathias Weske (eds.), Vol. 1920. CEUR-WS.org. Retrieved from <http://ceur-ws.org/Vol-1920>.
- Mike Marin, Richard Hull, and Roman Vaculin. 2012. Data centric BPM and the emerging case management standard: A short survey. In *Business Process Management Workshops, Revised Papers*. Springer, 24–30.
- Jan Mendling and Michael Hafner. 2008. From WS-CDL choreography to BPEL process orchestration. *Journal of Enterprise Information Management* 21, 5, 525–542.
- W. Mougayar. 2016. *The Business Blockchain: Promise, Practice, and Application of the Next Internet Technology*. John Wiley & Sons, Hoboken, NJ.
- Satoshi Nakamoto. 2008. Bitcoin: A peer-to-peer electronic cash system. <https://bitcoin.org/bitcoin.pdf>.
- Christopher Natoli and Vincent Gramoli. 2017. The balance attack or why forkable blockchains are ill-suited for consortium. In *Proceedings of the 47th IEEE/IFIP International Conference on Dependable Systems and Networks (DSN'17)*. IEEE.
- Michael Nofer, Peter Gomber, Oliver Hinz, and Dirk Schiereck. 2017. Blockchain. *Business & Information Systems Engineering* 59, 3, 183–187. DOI: <http://dx.doi.org/10.1007/s12599-017-0467-3>
- Alex Norta. 2015. Creation of smart-contracting collaborations for decentralized autonomous organizations. In *Proceedings of the International Conference on Perspectives in Business Informatics Research (BIR'15)*. 3–17.
- Alex Norta. 2016. Designing a smart-contract application layer for transacting decentralized autonomous organizations. In *Proceedings of the International Conference on Advances in Computing and Data Sciences (ICACDS'16)*.
- Christoph Prybila, Stefan Schulte, Christoph Hochreiner, and Ingo Weber. 2017. Runtime verification for business processes utilizing the bitcoin blockchain. *Future Generation Computer Systems*. DOI: <https://doi.org/10.1016/j.future.2017.08.024>
- Jan Ramberg. 2011. ICC guide to incoterms 2010. ICC.
- Manfred Reichert and Barbara Weber. 2012. *Enabling Flexibility in Process-Aware Information Systems - Challenges, Methods, Technologies*. Springer. DOI: <http://dx.doi.org/10.1007/978-3-642-30409-5>
- Michael Rosemann and Jan vom Brocke. 2015. The six core elements of business process management. In *Handbook on Business Process Management 1*. Springer, 105–122.
- Andrei Shleifer and Robert W. Vishny. 1997. A survey of corporate governance. *The Journal of Finance* 52, 2, 737–783.
- M. Staples, S. Chen, S. Falamaki, A. Ponomarev, P. Rimba, A. B. Tran, I. Weber, X. Xu, and L. Zhu. 2017. *Risks and Opportunities for Systems Using Blockchain and Smart Contracts*. Technical Report. Data61 (CSIRO), Sydney.
- Mojca Indihar Štemberger, Brina Buh, Ljubica Milanovic Glavan, and Jan Mendling. 2017. Propositions on the interaction of organizational culture with other factors in the context of BPM adoption. *Business Process Management Journal* 23
- Sattanathan Subramanian, Philippe Thiran, Nanjangud Narendra, Ghita Mostéfaoui, and Zakaria Maamar. 2008. On the enhancement of BPEL engines for self-healing composite web services. In *Proceedings of SAINT Symposium*. 33–39.
- Melanie Swan. 2015. *Blockchain: Blueprint for a New Economy*. O'Reilly Media, Inc., Sebastopol, CA.
- Nick Szabo. 1997. Formalizing and securing relationships on public networks. *First Monday* 2, 9.
- Gregory Tassej. 2000. Standardization in technology-based markets. *Research Policy* 29, 4, 587–602.
- Pankaj R. Telang and Munindar P. Singh. 2012. Comma: A commitment-based business modeling methodology and its empirical evaluation. IFAAMAS, Valencia, Spain, 1073–1080.
- An Binh Tran, Xiwei Xu, Ingo Weber, Mark Staples, and Paul Rimba. 2017. Regerator: A registry generator for blockchain. In *CAiSE'17: Proceedings of the International Conference on Advanced Information Systems Engineering, Forum Track (demo)*.
- Wil M. P. van der Aalst. 2016. *Process Mining - Data Science in Action*. 2nd ed. Springer.
- Wil M. P. van der Aalst, Marlon Dumas, Chun Ouyang, Anne Rozinat, and Eric Verbeek. 2008. Conformance checking of service behavior. *ACM Transactions on Internet Technology* 8, 3 (2008), 13:1–13:30.
- Wil M. P. van der Aalst and Mathias Weske. 2001. The P2P approach to interorganizational workflows. In *Proceedings of CAiSE*. 140–156.
- Rob J. B. Vanwersch, Khurram Shahzad, Irene T. P. Vanderfeesten, Kris Vanhaecht, Paul W. P. J. Grefen, Liliane Pintelon, Jan Mendling, Godefridus G. van Merode, and Hajo A. Reijers. 2016. A critical evaluation and framework of business process improvement methods. *Business & Information Systems Engineering* 58, 1, 43–53. DOI: <http://dx.doi.org/10.1007/s12599-015-0417-x>
- Viswanath Venkatesh, Michael G. Morris, Gordon B. Davis, and Fred D. Davis. 2003. User acceptance of information technology: Toward a unified view. *MIS Quarterly* 27, 3 (2003), 425–478.
- Jan vom Brocke and Theresa Sinnl. 2011. Culture in business process management: A literature review. *Business Process Management Journal* 17, 2, 357–378.
- M. Walport. 2016. Distributed ledger technology: Beyond blockchain. *UK Government Office for Science, Technical Report* 19, 2016.
- Ingo Weber, Vincent Gramoli, Mark Staples, Alex Ponomarev, Ralph Holz, An Binh Tran, and Paul Rimba. 2017. On availability for blockchain-based systems. In *Proceedings of the IEEE International Symposium on Reliable Distributed Systems (SRDS'17)*.

- Ingo Weber, Jochen Haller, and Jutta Mülle. 2008. Automated derivation of executable business processes from choreographies in virtual organizations. *International Journal of Business Process Integration and Management (IJBPIM'08)* 3, 2, 85–95.
- Ingo Weber, Xiwei Xu, Regis Riveret, Guido Governatori, Alexander Ponomarev, and Jan Mendling. 2016. Untrusted business process monitoring and execution using blockchain. In *Proceedings of 14th International Conference on Business Process Management (BPM'16). Lecture Notes in Computer Science*, Vol. 9850. Springer, Berlin, 329–347.
- J. Yli-Huumo, D. Ko, S. Choi, S. Park, and K. Smolander. 2016. Where is current research on blockchain technology? – A systematic review. *PLoS ONE* 11, 10, e0163477.
- Liangzhao Zeng, Boualem Benatallah, Anne Ngu, Marlon Dumas, Jayant Kalagnanam, and Henry Chang. 2004. QoS-aware middleware for web services composition. *IEEE TSE* 30, 5, 311–327.

Received October 2016; revised October 2017; accepted January 2018